


How to Specify the Conservation Rooflight®

Our standard 'On the Rafter' installation usually results in a Rooflight that sits flush to the roofline.


**On the Rafter
Clay Tile**

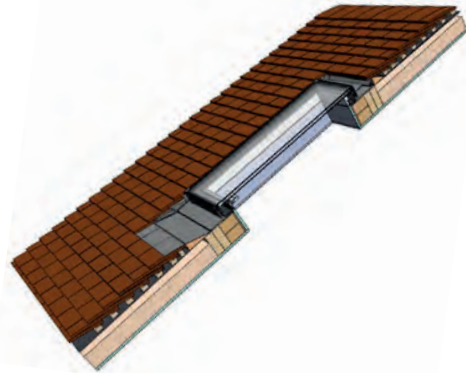


However for some shallow roof build-ups an 'On the Rafter' installation may result in a Rooflight that sits slightly proud of the roofline as illustrated (below left).

Some installers prefer to adjust their installation detail to ensure that the casement sits flush to the rooflines as they find this more aesthetically pleasing. To achieve this we offer an additional installation detail – what we term 'Between the Rafter' installation (below right). Here a larger structural aperture size is formed, to allow bearers to be fixed to the rafters at a lower position, and adjusted to the height of the Rooflight according to the roof build-up.

**On the Rafter
Slate**



**Between the Rafter
Slate**



*For non-tiled roofs (for example, standing seam) we recommend specific installation details. All of our standard installation details are available to download from our Website - <http://www.therooflightcompany.co.uk/installation-drawings>. If you have any queries please call our technically trained **Customer Services Team on 01993 833155**.